


# LSACT37A-R Accessory connector

Screw type, 0.2 to 2.5 mm<sup>2</sup>, Lock & Release latch, 18 pins, with 400V Variable Resistor, for digital output (8 points)

## Summary



* Wire holding structure	: Screw type
* Wire size (Ferrule)	: 0.2 to 2.5 mm <sup>2</sup>
* Accessory connector rock method	: Screw Fixing
* Number of pins	: 18

## Specifications


ITEM		SPECIFICATION
Classification		18 pins type DO only
Connection Type		DO : 8 ch (with 400V Variable Resistor)
Attachment position on the IOM Backplane		Right side
Tightening torque (to the IOM Backplane)		0.2 to 0.25 Nm (Recommendation)
Number of pins		18
Pitch		5.08mm
Wire holding structure		Screw type
Screw size		M2.5
Tightening torque		Minimum 0.4 Nm, Maximum 0.5 Nm
Power supply (IEC)		60V
Rated current (IEC)		3A
Dielectric strength		1500 V AC (Between neighbor pins)
Wire size		Wire end ferrule with isolation cover 0.2 to 2.5 mm <sup>2</sup> (AWG24 to AWG14)
		Flexible 0.2 to 4.0 mm <sup>2</sup> (AWG24 to AWG12)
Stripping length		7 mm
Flamability class UL94		V-0
Environmental conditions	Ambient temperature	(Operating) -5 to 60°C (Storage) -25 to 55°C
	Ambient humidity	(Operating) Less than 85% RH (No condensation) (Storage) Less than 85% RH (No condensation)
Weight		0.10 kg
Dimensions		50.0 mm (D) x 55.0 mm (H) x 102.0 mm (W) (Except projection)

About compliant module type:

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

# LSACT37A-R Accessory connector

Screw type, 0.2 to 2.5 mm<sup>2</sup>, Lock & Release latch, 18 pins, with 400V Variable Resistor, for digital output (8 points)

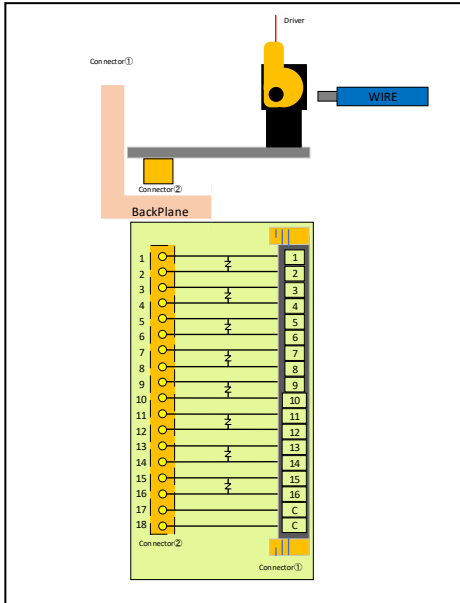

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.


DIASYS Netmation/DIASYS Netmation4S is a registered trademark of Mitsubishi Heavy Industries, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.

# LSACT37A-L Accessory connector

Screw type, 0.2 to 2.5 mm<sup>2</sup>, Lock & Release latch, 18 pins, with 400V Variable Resistor, for digital output (8 points)

## Summary



* Wire holding structure	: Screw type
* Wire size (Ferrule)	: 0.2 to 2.5 mm <sup>2</sup>
* Accessory connector rock method	: Screw Fixing
* Number of pins	: 18

## Specifications


ITEM		SPECIFICATION
Classification		18 pins type DO only
Connection Type		DO : 8 ch (with 400 Variable Resistor)
Attachment position on the IOM Backplane		Left side
Tightening torque (to the IOM Backplane)		0.2 to 0.25 Nm (Recommendation)
Number of pins		18
Pitch		5.08mm
Wire holding structure		Screw type
Screw size		M2.5
Tightening torque		Minimum 0.4 Nm, Maximum 0.5 Nm
Power supply (IEC)		60V
Rated current (IEC)		3A
Dielectric strength		1500 V AC (Between neighbor pins)
Wire size		Wire end ferrule with isolation cover 0.2 to 2.5 mm <sup>2</sup> (AWG24 to AWG14)
		Flexible 0.2 to 4.0 mm <sup>2</sup> (AWG24 to AWG12)
Stripping length		7 mm
Flamability class UL94		V-0
Environmental conditions	Ambient temperature	(Operating) -5 to 60°C (Storage) -25 to 55°C
	Ambient humidity	(Operating) Less than 85% RH (No condensation) (Storage) Less than 85% RH (No condensation)
Weight		0.10 kg
Dimensions		50.0 mm (D) x 55.0 mm (H) x 102.0 mm (W) (Except projection)

About compliant module type:

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

# LSACT37A-L Accessory connector

Screw type, 0.2 to 2.5 mm<sup>2</sup>, Lock & Release latch, 18 pins, with 400V Variable Resistor, for digital output (8 points)

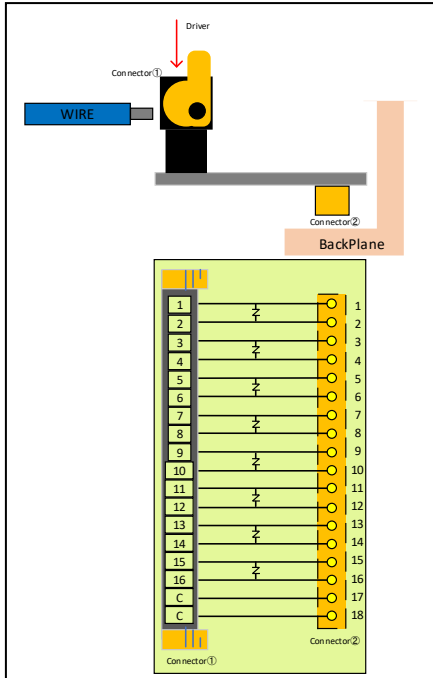

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

DIASYS Netmation/DIASYS Netmation4S is a registered trademark of Mitsubishi Heavy Industries, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.